


FIG. 9
CENTRAL OFFICE TRK. CCT.
Modified to maintain Lamp Operated
During ringing cycle

Orange two relays
added to provide
indication for FXO port.
disconnect supervision.
(Only valid when plugged in)

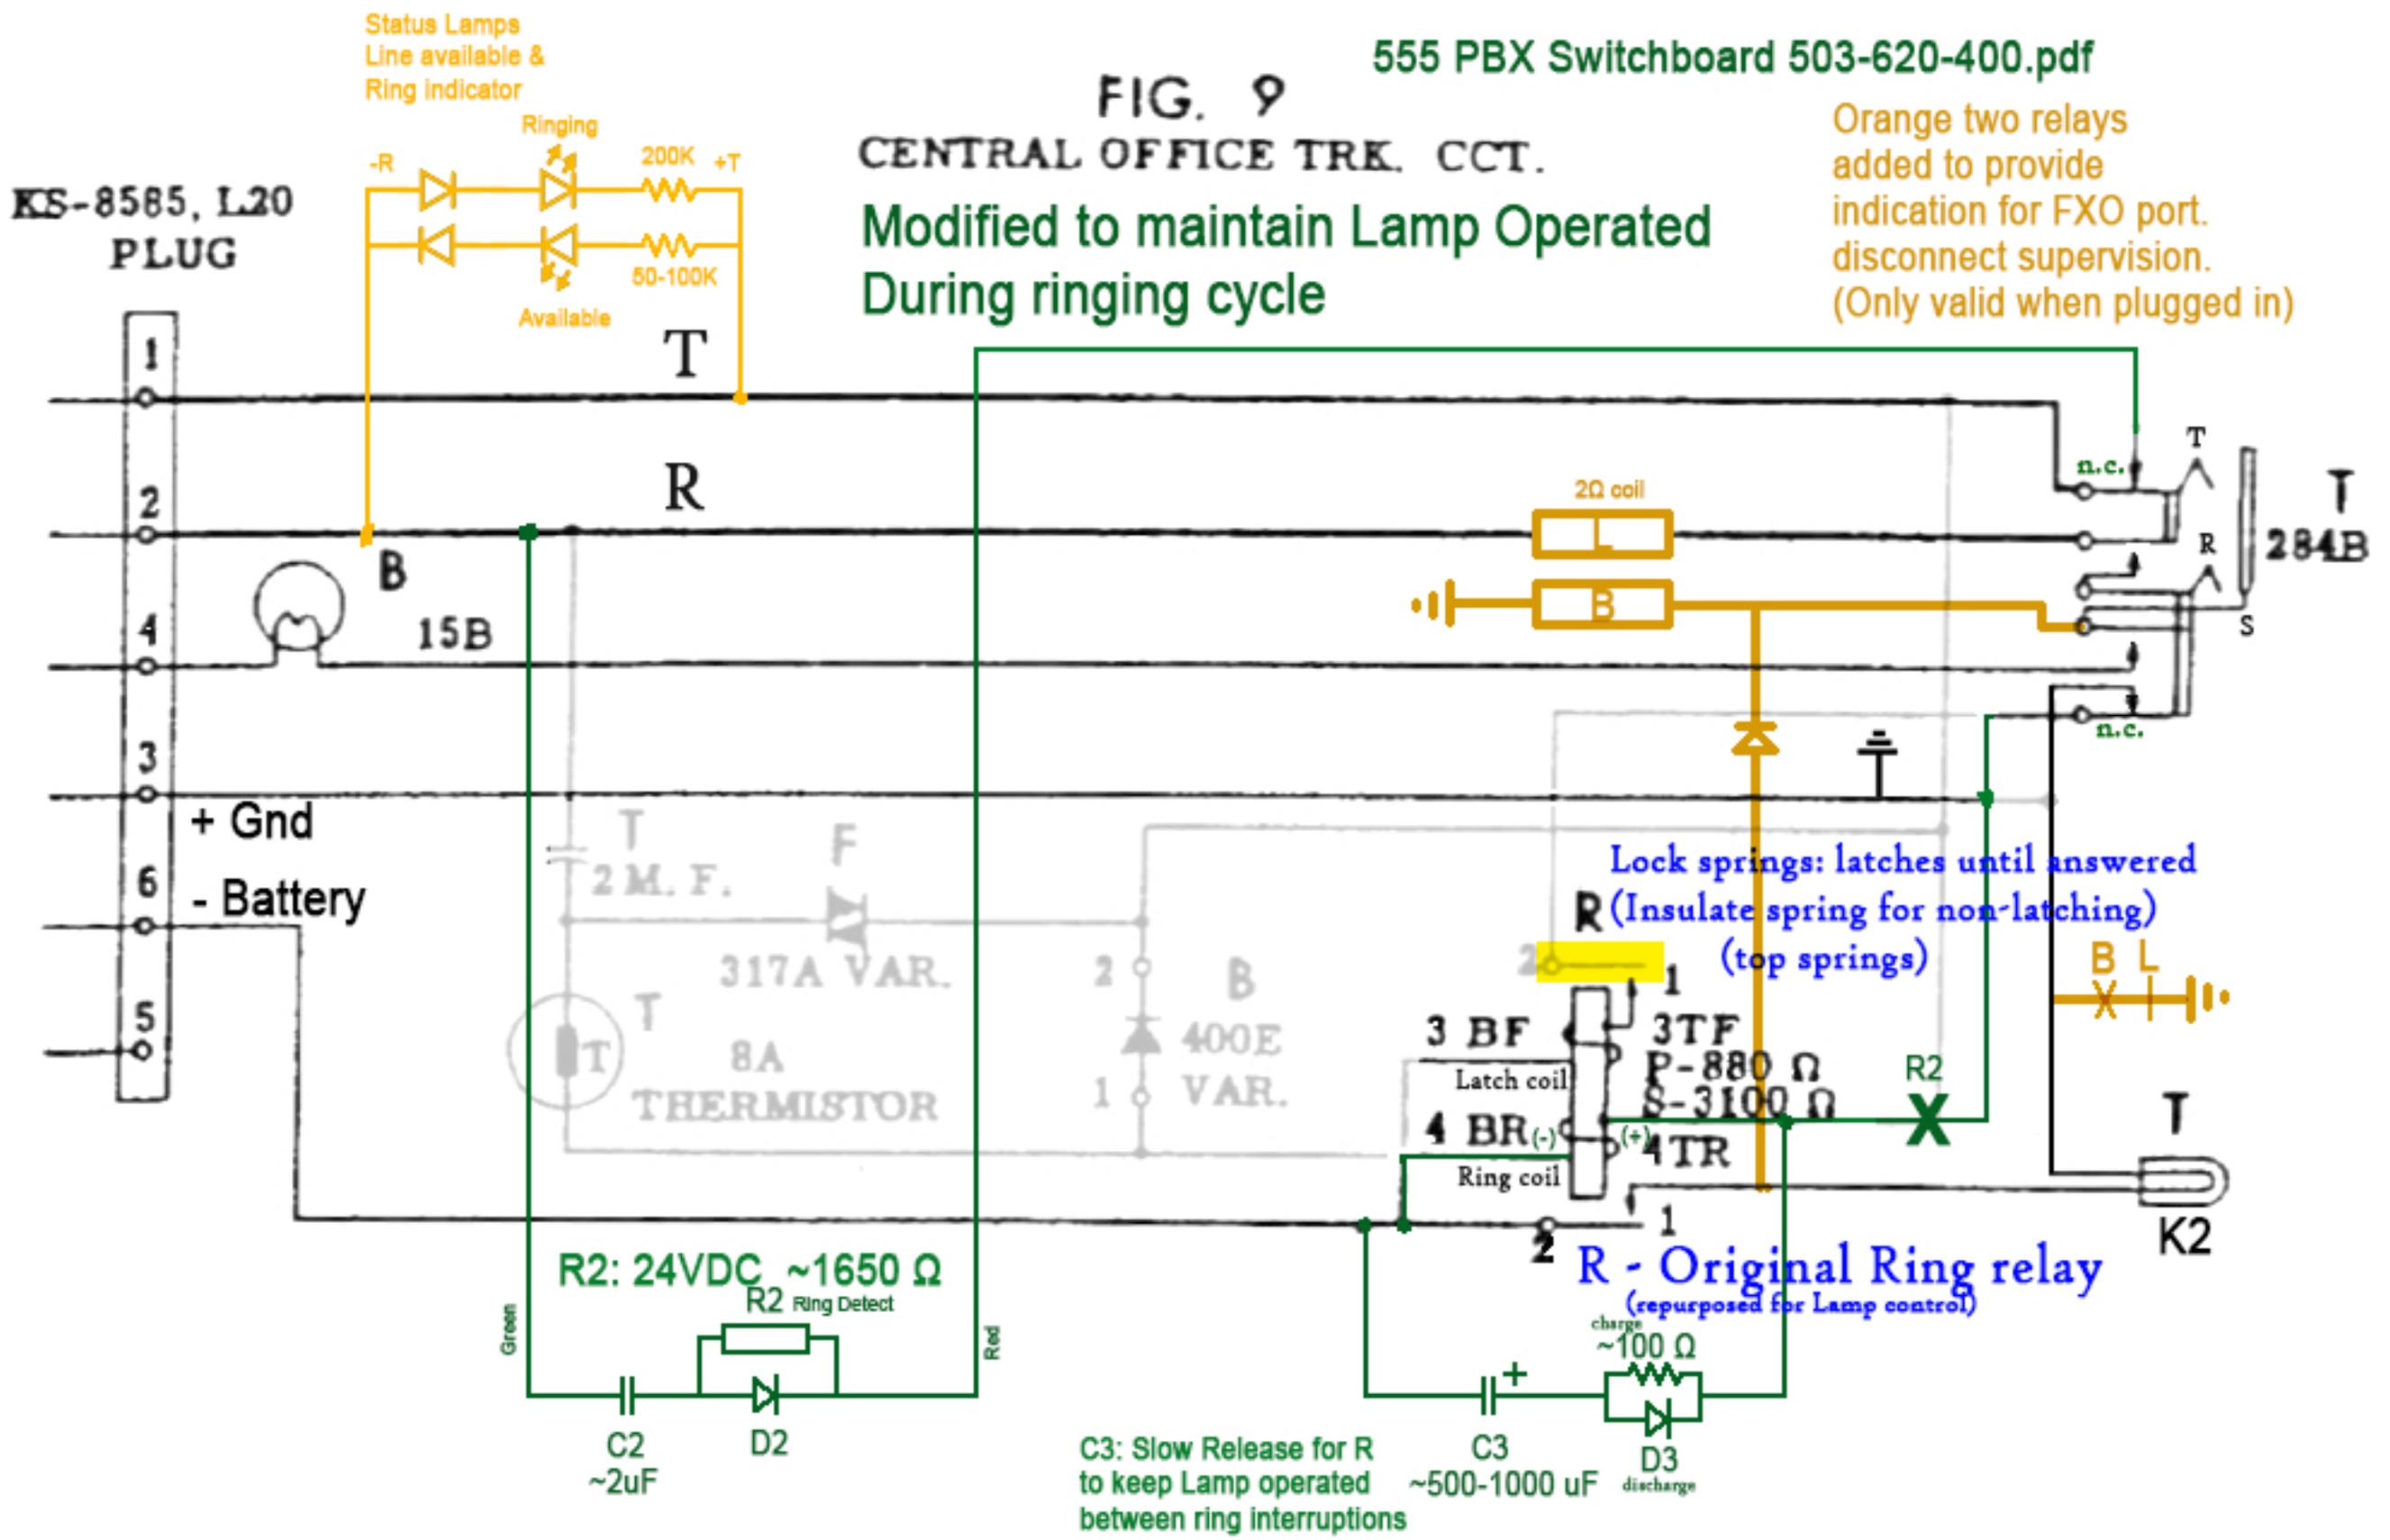

Lock springs: latches until answered
R (Insulate spring for non-latching)
(top springs)

R - Original Ring relay
(repurposed for Lamp control)

C3: Slow Release for R
to keep Lamp operated
between ring interruptions