


Nos. 204A & B CONNECTORS

SEE RATINGS
BELOW

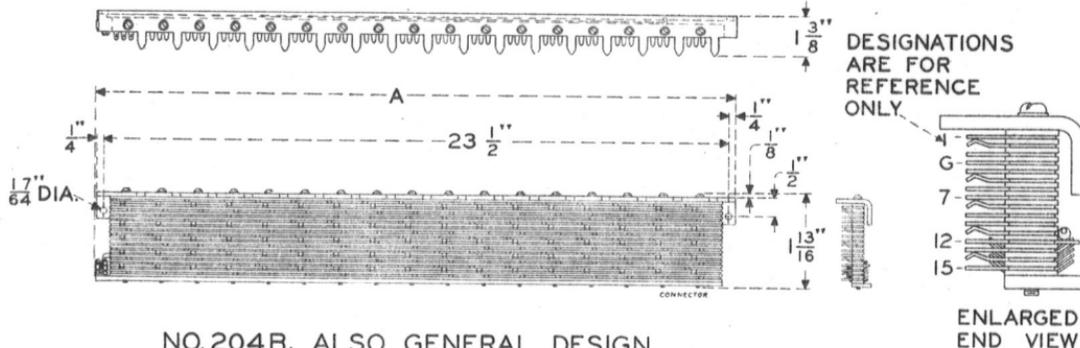

NO. 204B. ALSO GENERAL DESIGN
AND DIMENSIONS OF NO. 204A

Each consists essentially of strips of contacts assembled between insulators to form sixteen banks of contacts and one bank of soldering lugs. Each bank of contacts consists of three vertical rows of five contacts each, to accommodate a No. 348A plug.

Provided with an electrostatic shield designated G between contact strips 3 and 4.

No. 204A: The contacts of each strip are common electrically.

Intended for use in the No. 555 PBX switchboard.

No. 204B: The twelfth contact strip consists of six sections insulated from each other, one section on the left end having one contact and five sections having three contacts each. The five sections are each connected to a different terminal on a supplementary terminal block to the left of the contact strips. The contacts of each of the other strips are common electrically.

Intended for use in the No. 556A PBX switchboard.

Code No.	Dimension "A" (Inches)	Rating
204A	24	A. T. & T. Co. Std.
204B	24-3/32	" "