

FIG. 51 (MFR. DISC.)

FOR OFFICES USING FRAMES WITH D.T.A.

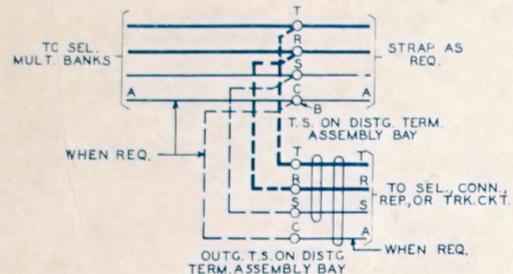


FIG. 52 (MFR. DISC.)

FOR 350A OFFICES USING FRAMES WITH D.T.A.

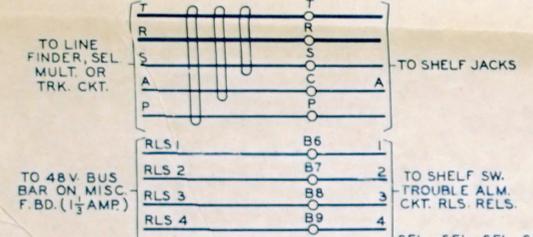


FIG. 53 (MFR. DISC.)

FOR OFFICES USING FRAMES WITHOUT D.T.A.




FIG. 54 (MFR. DISC.)

FOR NO. 1 OFFICES USING FRAMES WITH D.T.A.




FIG. 55 (MFR. DISC.)

FOR OFFICES USING FRAMES WITHOUT D.T.A.





FIG. 56 (A & M ONLY)

FOR 360A OFFICES



(FOR FIG. 1) FOR REGISTER LEADS


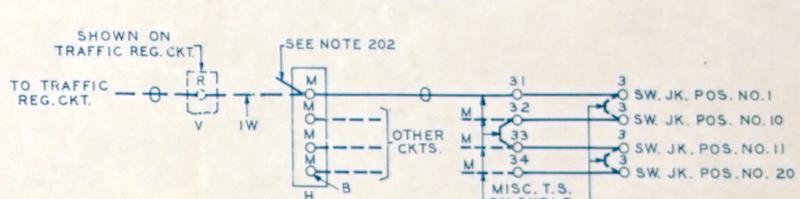


FIG. 58 (FOR FIG. 1) ONE PER SELECTOR

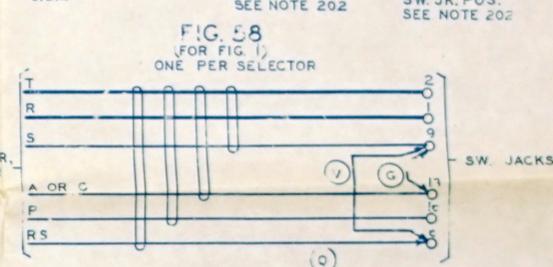


EQUIPMENT NOTES: 201. PRIOR TO ISSUE 10-D, OPTION "ZC" WAS "X". (A & M ONLY) 202. THE WIRING TO REGISTER CKT. IN FIG. 57 IS BASED ON ONE REGISTER FOR ALL SELECTORS ON THE SAME SHELF...

203. SWITCHES MAY BE GROUPED FOR TRAFFIC REGISTRATION ON A QUARTER, HALF OR FULL SHELF BASIS, OR ON THE BASIS OF MORE THAN ONE SHELF...

204. WHERE "Z" OPTION IS REQUIRED, THE 197DA SWITCH SHOULD BE MODIFIED BY REPLACING THE 11TH ROTARY STEP SPRINGS BY P-4635, 2 SPRINGS.

S10-EEPIE-02

FIG. 59
(FOR PART OF FIG. 1)

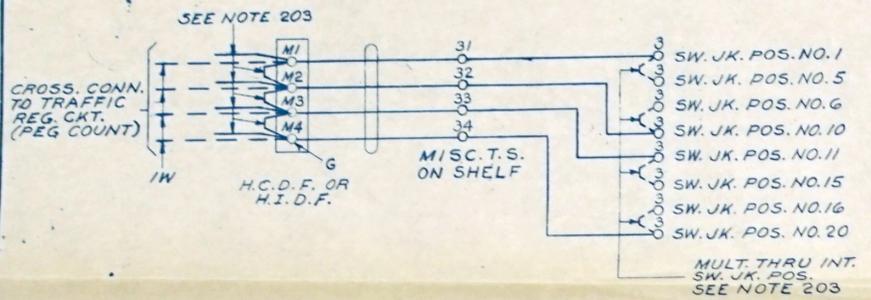

DWG.
ISS.
19 D
20 D
21 D
22 D
23 D

SD-31933-013

SD-31933-013

3 OR 4 WIRE SELECTOR CIRCUIT

3 SHEETS, SHEET 3

SD-31933-013

BELL TELEPHONE LABORATORIES, INC.

M4

PRINTED IN U. S. A.