
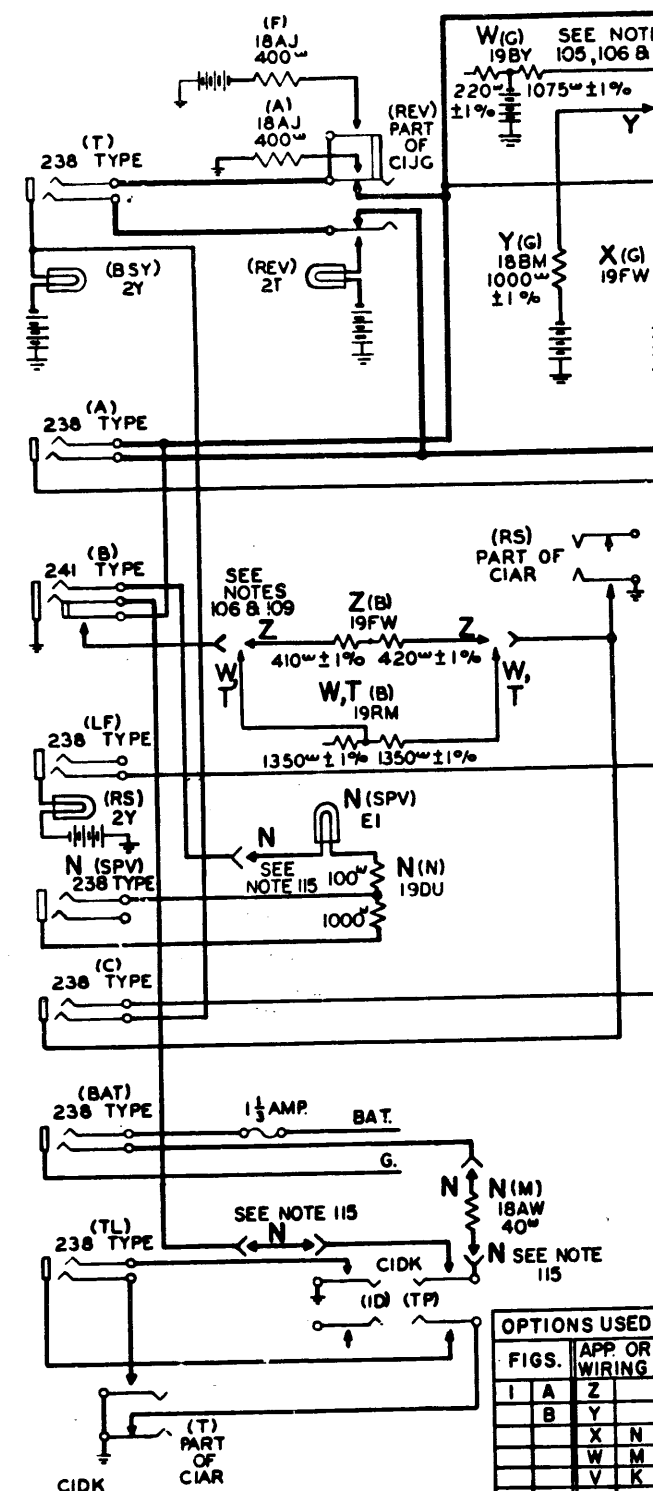


P.B.X. NO. 701A, 701B, 711A, 711B, 740A, 740B, 740C OR 740E TEST SET CIRCUIT

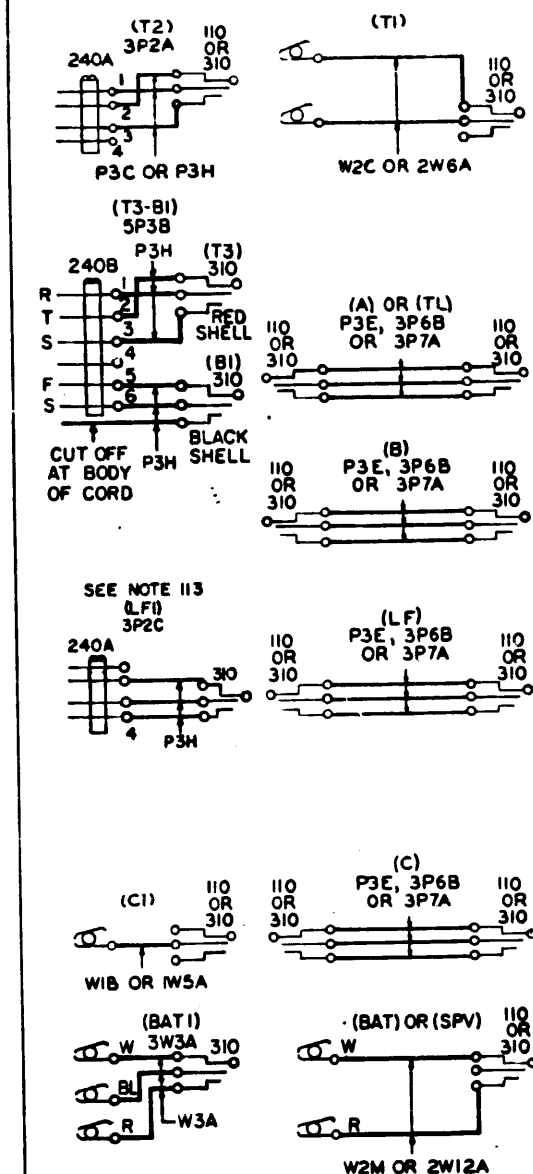

- CIRCUIT NOTES (CONT.):**
112. RUN A PAIR OF WIRES FROM THE VARISTOR TO THE (TEL) JACKS AND ANOTHER PAIR FROM THE VARISTOR TO THE INDUCTION COIL.
 113. THE (LFI) CORD IS USED ONLY WITH THE 701B OR 711B P.B.X.
 114. THE USE OF THE 6A DIAL IS RATED "MFR. DISC." AND SUPERSEDED BY THE 6A-3 DIAL ON ISSUE 16D. PRIOR TO ISSUE 16D THE 6A DIAL WAS NOT SHOWN.
 115. ON ISSUE 17B "N" WIRING AND APPARATUS ARE ADDED AND RATED STANDARD. PRIOR TO ISSUE 17B "N" WIRING AND APPARATUS WERE NOT SHOWN.
 116. ON ISSUE 18D OPTION "M" IS DESIGNATED AND RATED "MFR. DISC." AND OPTION "K" IS ADDED AND RATED STANDARD. PRIOR TO ISSUE 18D OPTION "M" WAS NOT DESIGNATED AND OPTION "K" WAS NOT SHOWN.

OPTIONS USED		
FIGS.		APP. OR WIRING
1	A	Z
	B	Y
		X
		W
		V
		T
		S
		R
		Q