


NO. 41D ALSO GENERAL DESIGN AND
DIMENSIONS OF NO. 41E, DA AND EA

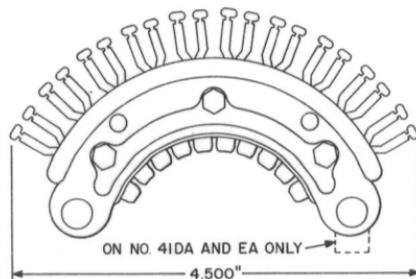

Each is equipped with one hundred wide contacts arranged in ten levels of ten contacts each.

Initial use: With No. 197 type switches in step-by-step dial telephone systems.

No. 41D & DA: Terminal ends of contacts are tinned.

No. 41E & EA: Terminal ends of contacts are arranged for connection to their associated wires by means of a machine clinching operation.

Furnished only as components of wired multiples of equipments. When necessary to replace individual No. 41E and 41EA banks for maintenance purposes, it is intended that the No. 41D and 41DA banks, respectively, be used.

Code No.	Comcode	Rating
41D	100 006 980	A.T.&T.Co.Std.
41E	100 006 998	" "
(*)41DA	100 007 004	" "
(*)41EA	100 007 061	" "

(*) The No. 41DA and 41EA are the same as No. 41D and 41E, respectively, except they are provided with a lug for mounting the upper end of a No. 9A commutator.