

# No. 252 TYPE RELAYS

(Card No. 1)

For detail information, see Card No. 2.

Three pole, single arm armature horizontal type relays. Insulated from the mounting plate.

Intended to mount in the right hand drilling of No. 985A or similar type mounting plates.

New and repaired relays do not vary more than  $\pm 5\%$  from the rated resistance unless otherwise indicated by footnote.


Equipped with heavy contacts.

All current values apply when rear winding is connected to a 48.5—50 volt battery.

Current in the front winding to be connected in a direction to aid the rear winding in order to cause the relay to operate and in the opposite direction to release the relay.

Closest recommended vertical mounting centers are 1-5/16 inches.

(\*) This dimension varies according to the number of contact springs on the individual relay.

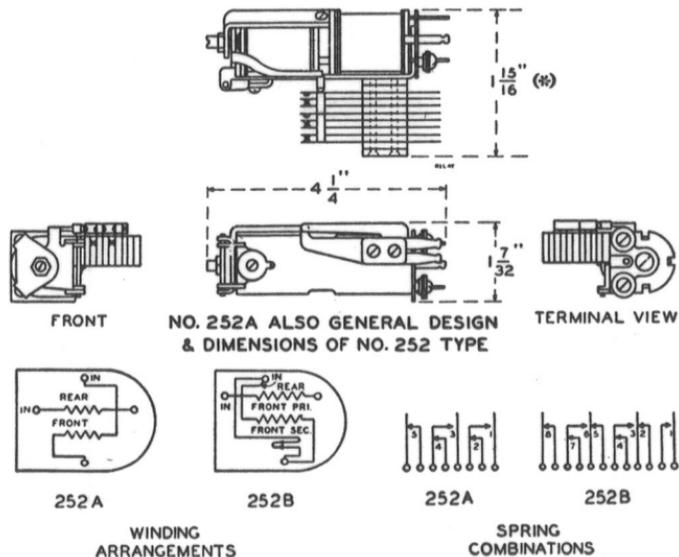

STANDARD METHOD OF WORDING ORDERS:

(Quantity) 252A Relays.